

RADIAL TRUCK TIRES / 2020 CATALOG

GOSAILUN.COM



SAILUN ADVANTAGE

What differentiates SAILUN from all the competition is its incredible value. A combination of outstanding quality, competitive pricing, expansive product selection, enhanced warranties and multiple retreads. We call this the "SAILUN Advantage".

SAILUN offers high-quality products that are well recognized in the industry for their outstanding retreadability. When you look at SAILUN's total tire lifecycle – from the competitive purchase price to the superior casing warrantied for three retreads – it's clear that the value and profitability of the SAILUN Advantage has CHANGED THE GAME!

The SAILUN Advantage has No Comparison. No other commercial tire in this category offers more.





SAILUN EFT PROGRAM

ENVIRONMENTALLY FRIENDLY TECHNOLOGY

SmartWay[®] Verified Technologies Low Rolling Resistance Tires

The EPA has determined that certain tire models can reduce NOx emissions and fuel use by 3 percent or more, relative to the best selling new tires for line haul trucks, when used on all five axles on long haul Class 8 trucks.^[1]

Sailun is proud to introduce the S605 EFT, S606 EFT, S665 EFT, S622 EFT, S696 EFT, S768 EFT, and the S753 EFT as SmartWay[®] Verified Low Rolling Resistance tires. At Sailun, the EFT program is our ongoing commitment to the environment and to our customers to deliver more for your investment while minimizing environmental impacts.

EPA SMARTWAY® VERIFIED TECHNOLOGIES

SmartWay[®] Verified Technologies, developed by the United States Environmental Protection Agency, is a public/private collaboration between the USEPA and the freight transportation industry that helps freight shippers, carriers, and logistics companies improve fuel-efficiency and save money.

[1] http://www.epa.gov/smartway/forpartners/technology.htm







SIZE CHART

	LO	NG HAUL	EFT	REGIONAL								MIXED	SERVICE	ON/OFF-ROAD				
	LHS	CSD	TRL	TRL	STR	STR/AP	STR/AP	AP/TRL	AP/TRL	DRV	DRV A/S	DRV A/S	DRV A/S	OSD	AP	WIDE	TRAC	TRA
SIZE:	S605 EFT	S768 EFT	S622 EFT	S696 EFT	S606 EFT	S665 EFT	S698	S637 S637T^	S668	S737	S757	S740	SW01	S753 EFT	S815	S825	S758	S91
ST235/80R16								G^										
ST235/85R16								G^										
215/75R17.5								Н		Н								
235/75R17.5								Н										
245/70R17.5								J										
225/70R19.5								G		G		G						
245/70R19.5								Н		G/H		Н						
265/70R19.5								Н										
10R22.5								G						G				
11R22.5	Н	Н	G		G/H	Н			Н		Н		Н	Н	Н		Н	Н
12R22.5					H*										Н			
295/80R22.5					H*													
315/80R22.5					J*		L								L			
295/75R22.5	Н	G	G		G	G			G					G				
255/70R22.5			H*					Н	Н					H*	Н			
275/70R22.5								Н							Н			
385/65R22.5																J		
425/65R22.5																L		
445/50R22.5				L														
12.00R24 (SET)																		L
11R24.5	Н	Н	G		G/H	Н			Н		Н		Н	Н	Н		Н	Н
285/75R24.5	Н	G	G		G	G								G				

0 R

^ Denotes trailer tire only




TABLE OF CONTENTS

- 6 S605 EFT / PREMIUM LINE-HAUL STEER
- 8 S606 EFT / PREMIUM STEER ALL-POSITION
- 10 S665 EFT / STEER ALL-POSITION
- 12 S698 PREMIUM REGIONAL ALL-POSITION
- 14 S637 REGIONAL ALL-POSITION
- 16 S668 REGIONAL ALL-POSITION / TRAILER
- 18 S622 EFT / FREE-ROLLING POSITION TRAILER
- 20 S696 EFT / ULTRA-WIDE BASE TRAILER
- 22 S637T HD ST TRAILER
- 24 S768 EFT / CLOSED SHOULDER DRIVE
- 26 S757 SUPER REGIONAL ALL WEATHER DRIVE
- 28 S753 EFT / OPEN SHOULDER DRIVE
- 30 SW01 ALL SEASON PREMIUM REGIONAL DRIVE
- 32 S740 REGIONAL METRO ALL WEATHER DRIVE
- 34 S737 REGIONAL METRO DRIVE
- 36 S815 MIXED SERVICE ALL-POSITION
- 38 S825 MIXED SERVICE WIDE BASE
- 40 S758 ON/OFF-ROAD TRACTION
- 42 S917 ON/OFF-ROAD TRACTION
- 44 MEDIUM RADIAL TRUCK LIMITED WARRANTY

ABBREVIATIONS

Code	Product Code
Size	Size
L.I.	Load Index
S.R.	Speed Symbol
P.R.	Ply Rating
T.D.	Tread Depth (32nds)
RIM	Rim Width (in)
O.D.	Overall Diameter (in)
S.W.	Section Width (in)
S.L.R.	Static Load Radius (in)
A.P.	Air Pressure (psi)
EFT 🏉	EFT Series Smartway Verified

Every effort has been made to verify the accuracy of the listed specifications. TBC Corporation and TBC Brands cannot be held responsible for any discrepancies, and as such, the information should be considered as approximate.

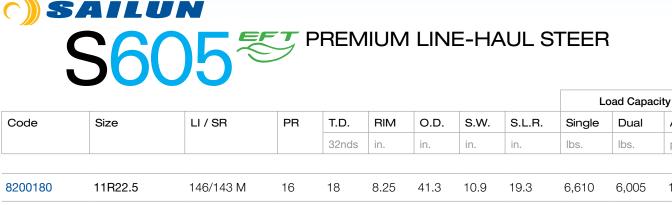

8200180	11R22.5	146/143 M	16	18	8.25	41.3	10.9	19.3	6,610	6,005	120	
8200182	11R24.5	149/146 M	16	18	8.25	43.4	10.9	20.3	7,160	6,610	120	
8200184	295/75R22.5	146/143 M	16	18	9.00	40.0	10.8	18.7	6,610	6,005	120	
8200186	285/75R24.5	147/144 M	16	18	8.25	41.4	10.8	19.4	6,780	6,175	120	_



The S605 EFT is Sailun's premium line-haul steer tire, featuring a decoupling groove and five wide ribs for a stable ride at all speeds. Stone ejectors minimize tire damage, while extra-wide grooves and S-sipes improve traction for excellent hydroplaning resistance.

Features & Benefits

- Decoupling groove helps to minimize irregular wear.
- S-sipes improve traction in wet conditions and dissipate heat for prolonged tread life.
- Unique tread wall bite edges reduce irregular wear and improve traction.
- Stone ejectors protect tire from stone drilling.
- SmartWay Verified for lower rolling resistance and excellent fuel efficiency on highways.

Applications:

- Line-Haul Trucks
- Intrastate and Interstate Buses
- Regional Trucks







New, industry-leading 8-Year Limited Warranty Three Recap Casing Warranty with a casing retread allowance * See Sailun Medium Radial Truck Tire Limited Warranty for complete details. (See page 50)

A.P.

psi







SAILUN S606⁵⁵ PREMIUM STEER ALL-POSITION

Code									L	oad Capao	city
Code	Size	LI / SR	PR	T.D.	RIM	O.D.	S.W.	S.L.R.	Single	Dual	A.P.
				32nds	in.	in.	in.	in.	lbs.	lbs.	psi
5543001	11R22.5	146/143 M	16	21	8.25	41.6	10.9	19.4	6,610	6,005	120
5542984	11R24.5	149/146 M	16	21	8.25	43.6	10.9	20.4	7,160	6,610	120
8245141	12R22.5*	152/148 M	16	21	9.00	42.7	12.1	19.9	7,830	6,940	123
1001398	295/75R22.5	144/141 L	14	21	9.00	39.9	11.7	18.8	6,175	5,675	110
8255184	295/80R22.5*	152/148 M	16	21	9.00	41.1	11.6	19.4	7,830	6,940	123
8244197	315/80R22.5*	156/150 L	18	20	9.00	42.6	12.1	19.8	8,820	7,380	125
1001400	285/75R24.5	144/141 L	14	21	8.25	41.3	10.8	19.5	6,175	5,675	110

* Non-EFT Tire



The S606 EFT is Sailun's premium steer tire, providing superior service for both Metro/Urban deliveries. This tire features extra-wide shoulders with built-in sipes for excellent stability and traction under all weather conditions. An extra-deep 21/32" tread depth ensures the S606 EFT delivers exceptional mileage, while an interlocking symmetrical tread block design promotes even wear and a square footprint.

Features & Benefits

- Wide footprint and square shoulder design for improved stability and mileage.
- Extra-deep tread pattern (21/32") with special compound for extended tread life.
- Multi-sipes improve traction in wet conditions and dissipate heat for prolonged tread life.
- Unique tread wall grooves help reduce irregular wear and improve traction.
 - Stone ejectors protect tire from stone drilling.
 - SmartWay Verified for lower rolling resistance and excellent fuel efficiency on highways.

Applications:

- Intrastate and Interstate Buses
- Regional Trucks
- Pickup and Delivery Trucks
- Tractor Trailers










SAILUN S665⁵⁵ STEER ALL-POSITION

								L	oad Capad	d Capacity				
Size	LI / SR	PR	T.D.	RIM	O.D.	S.W.	S.L.R.	Single	Dual	A.P.				
			32nds	in.	in.	in.	in.	lbs.	lbs.	psi				
·		i	'											
11R22.5	146/143 M	16	18	8.25	41.5	10.9	19.3	6,610	6,005	120				
11R24.5	149/146 M	16	18	8.25	43.5	10.9	20.3	7,160	6,610	120				
295/75R22.5	144/141 M	14	18	9.00	39.9	11.7	19.4	6,175	5,675	110				
285/75R24.5	144/141 M	14	18	8.25	41.3	11.1	18.7	6,175	5,675	110				
	11R22.5 11R24.5 295/75R22.5	11R22.5 146/143 M 11R24.5 149/146 M 295/75R22.5 144/141 M	11R22.5 146/143 M 16 11R24.5 149/146 M 16 295/75R22.5 144/141 M 14	11R22.5 146/143 M 16 18 11R24.5 149/146 M 16 18 295/75R22.5 144/141 M 14 18	11R22.5 146/143 M 16 18 8.25 11R24.5 149/146 M 16 18 8.25 295/75R22.5 144/141 M 14 18 9.00	32nds in. in. 11R22.5 146/143 M 16 18 8.25 41.5 11R24.5 149/146 M 16 18 8.25 43.5 295/75R22.5 144/141 M 14 18 9.00 39.9	32nds in. in. in. 11R22.5 146/143 M 16 18 8.25 41.5 10.9 11R24.5 149/146 M 16 18 8.25 43.5 10.9 295/75R22.5 144/141 M 14 18 9.00 39.9 11.7	32nds in. in. in. 11R22.5 146/143 M 16 18 8.25 41.5 10.9 19.3 11R24.5 149/146 M 16 18 8.25 43.5 10.9 20.3 295/75R22.5 144/141 M 14 18 9.00 39.9 11.7 19.4	$ \begin{array}{ c c c c c c c } Size & LI / SR & PR & T.D. & RIM & O.D. & S.W. & S.L.R. & Single \\ \hline 32nds & in. & in. & in. & in. & in. & Ibs. \\ \hline 11R22.5 & 146/143 M & 16 & 18 & 8.25 & 41.5 & 10.9 & 19.3 & 6,610 \\ \hline 11R24.5 & 149/146 M & 16 & 18 & 8.25 & 43.5 & 10.9 & 20.3 & 7,160 \\ \hline 295/75R22.5 & 144/141 M & 14 & 18 & 9.00 & 39.9 & 11.7 & 19.4 & 6,175 \\ \hline \end{array} $	Markade Markade <t< td=""></t<>				



The Sailun S665 EFT is an all-position radial truck tire optimized for steer axles. This tire is engineered for use in regional, interstate and metro applications on a large array of vehicle platforms.

Features & Benefits

- Micro-sipes within groove walls for enhanced traction in all weather conditions.
- Variable tread angles for self-cleaning and stone ejection.
- Reinforced sidewall for increased tread life.
- SmartWay Verified for lower rolling resistance and excellent fuel efficiency on highways.

Applications:

- Intrastate and Interstate Buses
- Regional Trucks
- Freight Trucks
- Local Buses
- Pick-up and Delivery Trucks
- Tractor Trailers







New, industry-leading 8-Year Limited Warranty Three Recap Casing Warranty with a casing retread allowance * See Sailun Medium Radial Truck Tire Limited Warranty for complete details. (See page 50)





SAILUN S698 PREMIUM REGIONAL ALL-POSITION

									L	oad Capad	ity
Code	Size	LI / SR	PR	T.D.	RIM	O.D.	S.W.	S.L.R.	Single	Dual	A.P.
				32nds	in.	in.	in.	in.	lbs.	lbs.	psi
5543385	315/80R22.5	157/154 L	20	17	9.00	42.4	12.3	19.7	9,090	8,270	130




The S698 is a premium all-position regional tire, designed with extra wide shoulder ribs that resist curbing damage and stone ejectors to reduce stone retention. Full-length sipes built into tread ribs effectively channel water for exceptional wet traction. The S698 is very versatile and suitable on all regional applications, such as buses and refuse trucks.

Features & Benefits

- 5-rib design and wide shoulders for improved stability.
- Tread profile designed to reduce rolling resistance and improve fuel economy.
- Interlocking multi-sipes improve traction in wet conditions and increase stability.

Applications:

- Coach Buses
- Local Buses
- Regional Trucks
- Refuse Trucks
- Motor Home Coaches









SAILUN S637 REGIONAL ALL-POSITION

Code									L	oad Capac	city
Code	Size	LI / SR	PR	T.D.	RIM	O.D.	S.W.	S.L.R.	Single	Dual	A.P.
				32nds	in.	in.	in.	in.	lbs.	lbs.	psi
8244379	215/75R17.5	135/133 L	16	16	6.00	30.4	8.1	14.2	4,805	4,540	125
8244381	235/75R17.5	143/141 L	16	17	6.75	31.6	8.9	14.7	6,005	5,675	125
1001319	245/70R17.5	143/141 J	18	17	7.50	31.0	9.7	14.4	6,005	5,675	125
8244383	225/70R19.5	128/126 L	14	16	6.75	32.0	8.6	14.9	3,970	3,750	110
5542989	245/70R19.5	136/134 M	16	16	7.50	33.0	9.7	15.4	4,940	4,675	120
8244332	265/70R19.5	140/138 M	16	18	7.50	34.2	10.2	15.8	5,510	5,205	112
1001468	10R22.5	141/139 M	14	19	7.50	40.1	10.0	18.7	5,675	5,355	115
8254389	255/70R22.5	140/137 M	16	18	7.50	36.7	9.7	17.1	5,510	5,070	120
8254392	275/70R22.5	148/145 M	16	19	8.25	37.9	10.7	17.6	6,940	6,395	130



The S637 is a versatile regional all-position tire, featuring five extra-wide ribs for exceptional stability at all speeds. An extra-wide solid shoulder resists damage caused by high-scrub applications, while a mirrored tread design ensures even wear. Wide grooves are designed for hydroplaning resistance, while a long-life rubber compound is engineered for extended tread life.

Features & Benefits

- Multi-sipes improve traction in wet conditions and dissipate heat for prolonged tread life.
- Tread pattern designed to reduced rolling resistance for improved fuel economy.
 - Unique tread wall grooves help reduce irregular wear and improve traction.

Applications:

- Pickup and Delivery Trucks
- Regional Trucks
- Regional Trailers
- Low Platform Trailers
- Intrastate and Interstate Buses
- RVs
- Tow Trucks





New, industry-leading 8-Year Limited Warranty Three Recap Casing Warranty with a casing retread allowance

^t See Sailun Medium Radial Truck Tire Limited Warranty for complete details. (See page 50)





SAILUN S668 REGIONAL ALL-POSITION / TRAILER

									L	oad Capad	ity
Code	Size	LI / SR	PR	T.D.	RIM	O.D.	S.W.	S.L.R.	Single	Dual	A.P.
				32nds	in.	in.	in.	in.	lbs.	lbs.	psi
5542483	11R22.5	146/143 M	16	16	8.25	41.5	11.0	19.0	6,610	6,005	120
5542487	11R24.5	149/146 M	16	16	8.25	43.5	11.0	20.0	7,160	6,610	120
5543368	255/70R22.5	140/137 L	16	16	7.50	36.6	10.0	17.1	5,510	5,070	120
5542488	295/75R22.5	144/141 M	14	16	9.00	39.9	11.7	19.0	6,175	5,675	110



The Sailun S668 is a regional radial tire designed for all positions and best suited for use on multi-axle and spread-axle trailers. The contoured shoulders and special Cut and Chip rubber compounding make the S668 ideal for use on multi-axle and spread-axle trailers.

Features & Benefits

- 5-Rib tread pattern promotes stable on-road performance and even tread wear.
- Cut and Chip resistant rubber compound.
- Solid shoulder design promotes lateral stability for all positions.
- Wide tread footprint maximizes tread life.

Applications:

- Spread-Axle Trailers
- Multi-Axle Trailers
- Pick-up and Delivery Trucks
- Regional Trucks







SAILUN S622⁵⁷ FREE-ROLLING POSITION TRAILER

									L	oad Capad	city
Code	Size	LI / SR	PR	T.D.	RIM	O.D.	S.W.	S.L.R.	Single	Dual	A.P.
				32nds	in.	in.	in.	in.	lbs.	lbs.	psi
1001302	11R22.5	144/142 M	14	12	8.25	41.3	10.9	19.2	6,175	5,840	105
1001306	11R24.5	146/143 M	14	12	8.25	43.2	10.9	20.2	6,610	6,005	105
8245385*	255/70R22.5*	140/137 L	16	14	7.50	36.5	9.7	17.0	5,510	5,070	120
1001286	295/75R22.5	144/141 M	14	12	9.00	39.8	10.8	18.6	6,175	5,675	110
1001304	285/75R24.5	144/141 M	14	12	8.25	41.1	10.8	19.3	6,175	5,675	110

* Non-EFT Tire



The S622 EFT is a premium free-rolling position trailer tire. The tread pattern features a decoupling groove to resist irregular wear and wide ribs to prevent damage caused by high-scrub applications. The S622 EFT is also a low-rolling resistance tire designed to maximize your mileage and fuel economy.

Features & Benefits

- Decoupling grooves help minimize irregular wear.
- V-sipes improve traction in wet conditions and dissipate heat for prolonged tread life.
- Main groove stone ejectors protect tire against stone drilling.
- 5 full-depth grooves for excellent traction in wet and dry conditions.
- SmartWay Verified for lower rolling resistance and excellent fuel efficiency on highways.

Applications:

- Tandem Trailers
- Tag Axles















				32nds	in.	in.	in.	in.	lbs.	lbs.	psi
5541470	445/50R22.5	161 M	20	13	14.00	40.0	17.5	18.8	10,200	-	120



The S696-EFT is a long-wearing 13/32nd tread depth tire, designed for tandem trailer applications. The wide shoulder rib is designed to stand up to lateral scrubbing and resist irregular wear that is common in this application.

Features & Benefits

- Light-weight to improve fuel economy
- Long-wearing for low cost per mile
- Alternative low-cost option for trade trailers
- SmartWay Verified

Applications:

- Tandem Trailers
- Tag Axle Trailers





New, industry-leading 8-Year Limited Warranty Three Recap Casing Warranty with a casing retread allowance * See Sailun Medium Radial Truck Tire Limited Warranty for complete details. (See page 50)

A.P.







									L	oad Capao	city
Code	Size	LI / SR	PR	T.D.	RIM	O.D.	S.W.	S.L.R.	Single	Dual	A.P.
				32nds	in.	in.	in.	in.	lbs.	lbs.	psi
5541960*	ST235/80R16	129/125 L	14	10	6.50	30.8	9.3	13.9	4,080	3,640	110
5540993*	ST235/85R16	132/127 L	14	12	6.50	31.7	9.3	14.3	4,400	3,860	110

* Requires special high-load capacity wheel. Consult wheel manufacturer for proper application.



The Sailun S637T is an all-steel highway rib tire designed to provide the ultimate in performance for trailer applications. The heavy-duty all-steel construction delivers low rolling resistance, superior strength and durability, while providing sure footing and straight tracking. The S637T is perfect for all high-load capacity trailer applications.

Features & Benefits

- All-steel construction for maximum strength and load capacity.
- Multi-sipes improve traction in wet conditions and dissipate heat for prolonged tread life.
- Five-rib design for improved stability.
- Solid shoulder to resist irregular wear and improve fuel efficiency.

Applications:

- RV Trailers
- 5th Wheel Trailers
- Utility Trailers
- Boat Trailers













									L	oad Capac	ity
Code	Size	LI / SR	PR	T.D.	RIM	O.D.	S.W.	S.L.R.	Single	Dual	A.P.
				32nds	in.	in.	in.	in.	lbs.	lbs.	psi
5542986	11R22.5	146/143 M	16	25	8.25	41.8	10.9	19.5	6,610	6,005	120
5542988	11R24.5	149/146 M	16	25	8.25	43.9	10.9	20.5	7,160	6,610	120
8200196	295/75R22.5	144/141 L	14	25	9.00	40.5	10.8	20.2	6,175	5,675	110
8200195	285/75R24.5	144/141 L	14	25	8.25	41.9	10.8	19.6	6,175	5,675	110



The S768 EFT is a premium closed shoulder drive tire, designed with a wide shoulder featuring tapered lateral edges for enhanced lateral stability. The S768 EFT also features stone ejector buttons that reduce stone retention, and an extra-deep tread depth for enhanced tread life.

Features & Benefits

- Wide footprint and square shoulder design for improved stability and mileage.
- Extra-deep tread pattern with special compound for extended tread life.
- Multi-sipes improve traction in wet conditions and dissipate heat for prolonged tread life.
- Stone ejectors protect tire from stone drilling.
- SmartWay Verified for lower rolling resistance and excellent fuel efficiency on highways.

Applications:

- Line-Haul Trucks
- Regional Trucks
- Intrastate and Interstate Buses














SAILUN S757 SUPER REGIONAL ALL-WEATHER DRIVE

									Load Capacity		
Code	Size	LI / SR	PR	T.D.	RIM	O.D.	S.W.	S.L.R.	Single	Dual	A.P.
				32nds	in.	in.	in.	in.	lbs.	lbs.	psi
5542490	11R22.5	146/143 L	16	26	8.25	41.9	11.0	19.5	6,610	6,005	120
5542494	11R24.5	149/146 L	16	26	8.25	43.9	11.0	20.4	7,160	6,610	120




The S757 represents a new generation of Sailun drive tires. The S757 is an all-weather drive tire engineered for traction and mileage in line-haul and regional service applications. The extra-wide footprint and solid shoulders improve stability and handling. The lug tread pattern and siping improves grip, and the 4 zig-zag channels evacuate water away from the tread face. The S757's 26/32" tread depth provides long tread life and lower cost per mile.

Features & Benefits

- Extra-wide footprint promotes stability, improved handling, even treadwear, and long tread life.
- Extensive sipes improve traction in wet conditions and dissipate heat for prolonged tread life.
- Tie-bars on external lugs add rigidity to lugs to prevent irregular wear and improve stability.

Applications:

- Regional Trucks
- Pick-up and Delivery Trucks
- Line-Haul Trucks











SAILUN S753 OPEN SHOULDER DRIVE

Code								V. S.L.R.	Load Capacity		
	Size	LI / SR	PR	T.D.	RIM	O.D.	S.W.		Single	Dual	A.P.
				32nds	in.	in.	in.	in.	lbs.	lbs.	psi
5543673*	10R22.5	141/139 M	14	23	7.50	40.6	10.0	18.7	5,675	5,355	115
5542971	11R22.5	146/143 M	16	25	8.25	41.8	10.9	19.3	6,610	6,005	120
5542987	11R24.5	149/146 M	16	25	8.25	43.9	10.9	20.5	7,160	6,610	120
5542386*	255/70R22.5	140/137 L	16	24	7.50	36.9	10.0	17.1	5,510	5,070	120
5540527	295/75R22.5	144/141 L	14	25	9.00	40.5	10.8	20.2	6,175	5,675	110
5540526	285/75R24.5	144/141 L	14	25	8.25	41.9	10.8	19.6	6,175	5,675	110

* Non-EFT Tire



The S753 is an open shoulder drive, excellent for regional and pickup applications. Featuring a center interlocking tread block designed for improved stability, the S753 delivers exceptional tread life.

Features & Benefits

- Open shoulder design and tread grooves promote self-cleaning characteristics and improve traction.
- Central and edge siping for improved traction.
- Extra-strong casing design for enhanced durability.
- Integrated central lugs for improved stability.
- SmartWay Verified for lower rolling resistance and excellent fuel efficiency on highways.

Applications:

- Pickup and Delivery Trucks
- Intrastate and Interstate Buses
- Regional Trucks
- Line-Haul Trucks
- Local Buses
- Dump Trucks





New, industry-leading 8-Year Limited Warranty Three Recap Casing Warranty with a casing retread allowance * See Sailun Medium Radial Truck Tire Limited Warranty for complete details. (See page 50)







SAILUN SVV01 ALL-SEASON PREMIUM REGIONAL DRIVE

									Load Capacity		
Code	Size	LI / SR	PR	T.D.	RIM	O.D.	S.W.	S.L.R.	Single	Dual	A.P.
				32nds	in.	in.	in.	in.	lbs.	lbs.	psi
5540969	11R22.5	146/143 L	16	27	8.25	41.9	11.0	19.3	6,610	6,005	120
5542068	11R24.5	149/146 L	16	27	8.25	43.9	11.0	20.2	7,160	6,610	120



The Sailun SW01 is a premium regional and highway drive tire designed for four-season traction. This versatile tire is ideal for all weather conditions and features an aggressive symmetrical tread design for exceptional traction in mud, snow and ice conditions.

Features & Benefits

- 3 Peak Mountain Snowflake (3PMSF) certification for severe winter service.
- Extensive sipes in tread pattern for exceptional mud, snow and ice traction.
- Aggressive tread blocks for outstanding snow and mud handling.
- Tread pattern promotes self-cleaning and resists stone drilling.

Applications:

- Regional Trucks
- Line-Haul Trucks
- Pick-up and Delivery Trucks
- Dump Trucks
- Mix Concrete Trucks
- Refuse Trucks
- Cold Weather Conditions





New, industry-leading 8-Year Limited Warranty Three Recap Casing Warranty with a casing retread allowance * See Sailun Medium Radial Truck Tire Limited Warranty for complete details. (See page 50)





									Load Capacity		
Code	Size	LI / SR	PR	T.D.	RIM	O.D.	S.W.	S.L.R.	Single	Dual	A.P.
				32nds	in.	in.	in.	in.	lbs.	lbs.	psi
5541271	225/70R19.5	128/126 L	14	21	6.75	32.2	8.9	15.4	3,970	3,750	110
5541270	245/70R19.5	135/133 L	16	21	7.50	33.3	9.8	15.4	4,805	4,540	125



The Sailun S740 premium regional drive is one of the first light commercial truck tires to receive the 3 Peak Mountain Snowflake (3PMSF) certiciation. The S740's combination of aggressive tread block design and extensive siping make this tire ideal for wet, mud, snow and ice conditions. The 3PMSF symbol lets you know that this is a superior perfoming all-weather tire that has met the requirements for severe snow service.

Features & Benefits

- Extensive sipes in tread pattern for exceptional ice and snow traction.
- Aggressive tread blocks for outstanding snow and mud handling.
- Open tread pattern cleans out well in snow and mud conditions.
- 3 Peak Mountain Snowflake denotes a true winter tire.

Applications:

- Regional Trucks
- Pick-up and Delivery Trucks
- Tow Trucks
- Cold Weather Conditions









SAILUN S737 REGIONAL METRO DRIVE

									Load Capacity		
Code	Size	LI / SR	PR	T.D.	RIM	O.D.	S.W.	S.L.R.	Single	Dual	A.P.
				32nds	in.	in.	in.	in.	lbs.	lbs.	psi
8244979	215/75R17.5	135/133 L	16	19	6.00	30.5	8.1	14.1	4,805	4,540	125
8244983	225/70R19.5	128/126 L	14	20	6.75	32.2	8.6	15.0	3,970	3,750	110
8244986	245/70R19.5	133/131 L	14	21	7.50	33.4	9.6	15.5	4,540	4,300	110
5542990	245/70R19.5	136/134 M	16	21	7.50	33.4	9.6	15.5	4,940	4,675	120



The S737 is a regional pickup and delivery drive tire, with 6-interlocking tread blocks and a symmetrical design engineered to promote even wear throughout the tire's life. Tapered lateral grooves make the S737 a performer in all-weather applications.

Features & Benefits

- Integrated tie bars reduce irregular wear and promote increased stability.
- Angled lug and siping design improves overall traction and wet grip.
- M&S rated, all-weather lug tread designed for regional use.
- Lug-to-void ratio optimized for self-cleaning and excellent traction.

Applications:

- Pickup and Delivery Trucks
- Regional Trucks
- RVs
- Tow Trucks









SAILUN S815 MIXED SERVICE ALL-POSITION

Code					RIM		. S.W.	S.L.R.	Load Capacity		
	Size	LI / SR	PR	T.D.		O.D.			Single	Dual	A.P.
				32nds	in.	in.	in.	in.	lbs.	lbs.	psi
8244551	11R22.5	146/143 K	16	23	8.25	41.7	10.9	19.4	6,610	6,005	120
8200222	12R22.5	152/148 L	16	21	9.00	42.9	11.8	19.9	7,830	6,940	123
8244558	11R24.5	149/146 K	16	23	8.25	43.7	10.9	20.4	7,160	6,610	120
5545709	255/70R22.5	140/137 L	16	20	7.50	36.6	10.0	17.1	5,510	5,070	120
8244589	275/70R22.5	148/145 K	16	22	8.25	37.7	10.7	17.7	6,940	6,395	130
8244471	315/80R22.5	161/157 G	20	22	9.00	42.4	12.1	19.9	10,200	9,090	130



The S815 is a mixed service tread, featuring a chip-resistant compound ideally suited for off-road and construction applications. A zigzag tread pattern design reduces stone retention, while maximizing traction under all applications. Sidewall protectors are engineered to provide an enhanced level of protection to the casing.

Features & Benefits

- Large, deep shoulder grooves for improved traction and heat dissipation.
- Interlocking ribs promote improved stability and smoother wear.
- Wide footprint and unique shoulder design for improved stability.
- Specially formulated compound and deep tread depth for improved tread life.
- Stone ejectors protect tire from stone drilling.

Applications:

- Dump Trucks
- Mix Concrete Trucks
- Regional Trucks
- Regional Trailers
- Multi-Axle Trailers
- Spread-Axle Trailers
- Dump Trailers





New, industry-leading 8-Year Limited Warranty Three Recap Casing Warranty with a casing retread allowance

See Sailun Medium Radial Truck Tire Limited Warranty for complete details. (See page 50)





									Load Capacity			
Code	Size	LI / SR	PR	T.D.	RIM	O.D.	S.W.	S.L.R.	Single	Dual	A.P	
				32nds	in.	in.	in.	in.	lbs.	lbs.	psi	
8244651	385/65R22.5	158 K	18	21	11.75	42.2	14.9	19.8	9,370	N/A	120	
8244655	425/65R22.5	165 K	20	23	12.25	44.3	16.4	20.3	11,400	N/A	120	



The S825 is an all-position mixed service tire, engineered with a rubber compound that resists high-scrub and off-road applications. Stone ejector buttons reduce tire damage, and angled tread blocks are designed to deliver excellent wet traction.

Features & Benefits

- Wide footprint and unique shoulder design for improved stability.
- Interlocking lugs promote improved stability and smoother wear.
- Specially formulated compound for improved tread life.
- Stone ejectors protect tire against stone drilling.

Applications:

- Dump Trucks
- Refuse Trucks
- Mix Concrete Trucks
- Regional Trucks







New, industry-leading 8-Year Limited Warranty Three Recap Casing Warranty with a casing retread allowance * See Sailun Medium Radial Truck Tire Limited Warranty for complete details. (See page 50)



SAILUN S758 ON/OFF-ROAD TRACTION

									Load Capacity				
Code	Size	LI / SR	PR	T.D.	RIM	O.D.	S.W.	S.L.R.	Single	Dual	A.P.		
				32nds	in.	in.	in.	in.	lbs.	lbs.	psi		
5543059	11R22.5	146/143 K	16	31	8.25	42.2	10.9	19.6	6,610	6,005	120		
5543060	11R24.5	149/146 K	16	31	8.25	43.9	10.9	20.6	7,160	6,610	120		



The S758 is designed for severe off-road traction applications. With an extra-deep 31/32" tread depth and a rubber compound engineered to resist the most demanding environments, the S758 is ideal for construction, logging, and off-road environments. Stone ejectors resist the damages caused by stone retention, and an open shoulder with tapered sidewalls aid in lateral stability.

Features & Benefits

- Open groves to maximize self-cleaning.
- Stone ejectors protect tire against stone drilling.
- Extra-deep tread (31/32") tread depth.
- M&S lug pattern designed specifically for on and off-road applications.

Applications:

- Dump Trucks
- Logging Trucks
- Mix Concrete Trucks







New, industry-leading 8-Year Limited Warranty Three Recap Casing Warranty with a casing retread allowance * See Sailun Medium Radial Truck Tire Limited Warranty for complete details. (See page 50)





SAILUN S917 ON/OFF-ROAD TRACTION

									Load Capacity			
Code	Size	LI / SR	PR	T.D.	RIM	O.D.	S.W.	S.L.R.	Single	Dual	A.P.	
				32nds	in.	in.	in.	in.	lbs.	lbs.	psi	
8256851	11R22.5	148/145 G	16	31	8.25	42.1	10.9	19.6	6,940	6,390	123	
1001252	11R24.5	149/146 G	16	31	8.25	43.9	11.0	20.6	7,160	6,610	120	
8246837	12.00R24 ^	160/157 F	20	32	8.50	48.7	12.4	22.8	9,920	9,090	120	

^ Denotes Tube Type



The Sailun S917 drive tire has been engineered to perform in demanding off-road conditions, such as mining, construction and logging applications. The S917 features an aggressive multilug tread design for exceptional off-road traction and an enhanced rubber compound to resist cuts and chunking. Open shoulder ribs deliver superior stability and resistance to uneven wear. The S917's deep 31/32" tread depth provides long tread life and an exceptional cost per mile.

Features & Benefits

- Aggressive multi-lug design.
- Deep tread depth for excellent tread life.
- Open shoulder design for excellent traction.

Applications:

- Logging Trucks
- Ready Mix Trucks
- Refuse Trucks
- Dump Trucks







New, industry-leading 8-Year Limited Warranty Three Recap Casing Warranty with a casing retread allowance * See Sailun Medium Radial Truck Tire Limited Warranty for complete details. (See page 50)



SAILUN

MEDIUM RADIAL TRUCK LIMITED WARRANTY

Applies to tires purchased on or after March 1, 2020

ELIGIBILITY

This limited warranty provides two separate coverage benefits: (1) a limited warranty with respect to defects in material, workmanship or design; and (2) a limited radial casing retread warranty. The limited warranty with respect to defects in material, workmanship or design has a full replacement period (minus taxes and some associated costs) and a prorated period. You are eligible for the Sailun Medium Radial Truck Tire ("Tire") limited warranty benefits if you purchased the Tire on or after March 1, 2020. And, in addition, you are the original owner of this Tire, it bears the prescribed Department of Transportation (DOT) identification number, it has been continuously installed on the vehicle on which it was originally installed, and no warranty exclusion or exception applies.

LIMITED WARRANTY AGAINST DEFECTS-NON-PRORATED

Sailun Tire Americas (STA) shall replace an eligible Sailun Medium Radial Truck Tire covered by this limited warranty that becomes unserviceable due to a defect in design, workmanship, or material **during** the first 50% of the original usable tread life (defined as the original tread depth minus 2/32") with a comparable new Sailun tire without charge for the Tire. If a new comparable Sailun Medium Radial Truck Tire is not available, STA shall replace it with a comparable tire marketed by TBC Corporation, a distributor of Sailun tires, without charge for the Tire. Fees and/or taxes associated with the mounting and balancing of the replacement tire may apply. Please see the service provider for cost details.

LIMITED WARRANTY AGAINST DEFECTS-PRORATED

STA shall replace an eligible Sailun Medium Radial Truck Tire covered by this limited warranty that becomes unserviceable due to a defect in design, workmanship, or material after the first 50% of the original tread life on a prorated basis. The amount of the allowance is determined based on the percentage of the original "Useable Tread" remaining when the tire is presented for adjustment. The percentage allowance is applied to the purchase price of a comparable new Sailun Medium Radial Truck Tire or other comparable tire brand marketed by TBC Corporation. You are responsible for paying for the price of the warranty replacement tire after the appropriate warranty allowance is deducted plus the charges for mounting and balancing the replacement tire as well as any applicable fees and/or taxes. The benefits of this limited warranty for defects in design, material and workmanship terminate once the Useable Tread of a Sailun Medium Radial Truck Tire has been exhausted or eight (8) years from date of manufacture indicated on the tire, whichever is earlier.

COMPUTING REMAINING USEFUL TREAD

The remaining "Useful Tread" of your Sailun Medium Radial Truck Tire is computed as a percentage of the original tire's usable tread depth. These depths vary by tire size. The original usable tread does not include the last 2/32nd inch (1.6 millimeters) of tread depth because tires become unsafe for use and must be replaced to avoid accident or injury when the tread depth remaining is 2/32" or less. Because tires do not always wear evenly, tread depth may vary depending where on the tire's tread depth is measured. The lowest depth on the tire is used to determine the remaining tread life for purposes of warranty replacement.

LIMITED RADIAL CASING RETREAD WARRANTY

The Limited Radial Casing Retread Warranty terminates after an eligible Tire has been retreaded three (3) times or eight (8) years after the manufacture date on the Tire, whichever occurs first. TBC Corporation will apply a radial casing warranty allowance to the purchase price of a new Sailun Medium Radial Truck Tire or a comparable new tire if your Sailun Medium Radial Truck Tire cannot be retreaded due defects in design, workmanship or materials prior to termination of this Limited Radial Casing Retread Warranty. The number of times the Tire has been retreaded must be clearly identified on the casing sidewall. The limited retread warranty coverage of the radial casing of your new Sailun Medium Radial Truck Tire may continue beyond the end of the tire's original useful tread life. **Exclusion:** Sailun Medium Radial Truck used in off-highway service (such as mining & logging) <u>are excluded</u> and the tires are not covered under this Limited Radial Casing Retread Warranty. TBC Corporation will provide the following predetermined radial casing allowances for the first retread if this limited warranty applies:

TIRE SIZE	CASING ALLOWANCE
235/85R16, 215, 235/75R17.5	\$15.00
225, 245, 265/70R19.5	\$30.00
255, 275/70R22.5	\$65.00
10R22.5	\$45.00
11R22.5, 295/75R22.5	\$65.00
12R22.5	\$70.00
11R24.5	\$70.00
285/75R24.5	\$75.00
315/80R22.5	\$70.00
385/65R22.5	\$75.00
425, 445/65R22.5	\$80.00
445/50R22.5 *	\$80.00

Casing value is reduced by 50% of the above values after the second retread.

*445/50R22.5 casing warranty up to the point of buff for second retread.

DEFINITION OF A COMPARABLE TIRE

For the purposes of your limited warranty against defects in design, workmanship, and materials and the limited radial casing warranty, a "comparable" tire will be supplied if a matching new Sailun Medium Radial Truck Tire is out of production or is unavailable when the Tire is presented for warranty replacement. In which case, the warranty replacement tire may be substituted and will be a tire of equal price, quality and construction. A comparable tire may also have a different sidewall or tread configuration. If the purchaser requests a higherpriced replacement tire instead, the purchaser must pay the price difference for the "upgrade" after the appropriate prorated allowance has been deducted.

WARRANTY EXCLUSIONS AND LIMITATIONS (NON-ELIGIBILE)

The exclusions and limitations on the applicability of this limited warranty with respect to defects in material, workmanship or design set forth in this section and other sections should be read carefully because they may determine whether you are entitled to a warranty replacement or a warranty replacement allowance. The limited warranty with respect to defects in material, workmanship or design provided for the Sailun Medium Radial Truck tire you purchased does not apply if the tire failed because of any one of the following:

- tires installed on a vehicle registered or normally used outside the United States
- the tire was transferred to another vehicle after it was originally installed
- the tire is branded as "Blemish" or "NA" or the molded DOT number has been removed or disfigured
- the tire was repaired only with a self-vulcanizing plug, improper section repairs or in a manner that does not comply with U.S. Tire Manufacturers Association standards
- tire failures caused by road hazard, potholes, or collision damage

- vandalism, theft, off-road use, long-term improper storage or other abuse
- improper mounting procedures or applications
- over and under inflation, overloading, or failure to maintain proper tire pressure
- addition of liquids, solids or gases (other than air, nitrogen, carbon dioxide) such as sealers or balancing materials
- ozone or weather cracks or checking occurring four (4) years after the date of purchase or, if that proof is not available, four (4) years after the DOT serial date
- mechanical failures of the vehicle on which the tires was originally installed, improper alignment, or brake and shock failure of said vehicle
- the rim on which the tire is mounted is defective or fails
- tires with "irregular tread wear" (which is defined as a tread groove depth differences of 2/32nds of an inch or more on the same tire)
- tires submitted for ride disturbance complaints after 2/32" of tread wear or 12 months from date of purchase, whichever occurs first

NOTE: THIS WARRANTY GIVES YOU SPECIFIC RIGHTS, WHICH VARY FROM STATE TO STATE. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGE OR HOW LONG AN IMPLIED WARRANTY MAY LAST, SO CERTAIN LIMITATIONS OR EXCLUSIONS HEREIN MAY NOT APPLY TO YOU. HOWEVER, TO THE EXTENT PERMITTED BY THE LAWS OF YOUR STATE, SAILUN AND TBC CORPORATION DISCLAIM ALL WARRANTIES EXPRESS OR IMPLIED OTHER THAN THE WARRANTIES STATED IN THIS LIMITED WARRANTY, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE IS LIMITED IN DURATION AND EXPIRES WHEN THE TIRE'S USEABLE TREAD IS EXHAUSTED AS SPECIFIED IN THIS LIMITED WARRANTY. TO THE EXTENT PERMITTED BY LAW, THIS WARRANTY DOES NOT COVER AND EXPRESSLY EXCLUDES ANY COVERAGE OR LIABILITY FOR PUNITIVE DAMAGES, FOR LOSS OF TIME, INCONVENIENCE, LOSS OF USE OF YOUR VEHICLE OR TIRE, LOST PROFITS, OR ANY OTHER INCIDENTAL OR CONSEQUENTIAL DAMAGES. THIS IS THE ONLY WARRANTY THAT APPLIES TO THE SAILUN MEDIUM TRUCK TIRES PURCHASED BY YOU AND SUPERSEDES AND REPLACES THE TERMS OF ANY PREVIOUS WARRANTY. NOTHING IN THIS LIMITED WARRANTY IS INTENDED TO BE A REPRESENTATION THAT TIRE FAILURES CANNOT OCCUR SAILUN AND/OR TBC CORPORATION NEITHER ASSUMES NOR EXTENDS. NOR AUTHORIZES ANY OTHER PERSON OR ENTITY TO ASSUME OR EXTEND ON ITS BEHALF, ANY OTHER OR DIFFERENT WARRANTY OBLIGATION.

This Limited Warranty is the entire warranty given by STA. – The complete obligations are set forth herein. No one has the authority to imply, suggest, agree, represent, warranty or promise anything contrary to the terms of this Limited Warranty.

OWNERS OBLIGATIONS

To make a claim under this Limited Warranty, you must present the warranted tire to an authorized Sailun Medium Radial Truck Tire dealer for adjustment along with the following items: proof of purchase showing that you purchased the Tire and the vehicle on which the Tire was originally installed. Your original invoice when you purchased the Tire should contain this information. You are responsible for payment for any extra products, services, or upgrades, including any fees and taxes related thereto, that you request that are not covered by the Limited Warranty.

ADJUSTMENT PROCEDURE

Please contact the original retailer from whom the tire was purchased to inspect the tire and review the warranty claim. If the

retailer is not accessible, you may call 1-800-238-6469 and speak to TBC Corporation's Consumer Relations department. A product Warranty Specialist will confirm the Sailun Tire, and discuss your tire issue with you based on the Sailun Limited Warranty. They will find a Sailun Medium Radial Truck Tire dealer nearest you to whom you may take your Sailun Medium Radial Truck Tire for inspection and any applicable warranty adjustment.

Because TBC Corporation values customer service, TBC Corporation will work with the tire dealer to supply a replacement Sailun Medium Radial Truck Tire or comparable tire in an efficient manner.

IMPORTANT SAFETY INFORMATION

Although any tire, no matter how well constructed, may fail due to many reasons, including but not limited to, road hazards like nails, pot holes or road debris and improper installation, maintenance or service, which could create the risk of property damage and/or serious or fatal injury, in an effort to help to keep you safe, here is a non-exhaustive list of practices with which you should comply:

- ONLY HAVE PROFESSIONALLY TRAINED PERSONNEL MOUNT AND BALANCE TIRES.
- Property damage and serious or fatal injury can also result from improper tire mounting and inflation procedures which can cause the tire beads to break with explosive force during installation of the tire on the wheel rim. This can also occur when tire size is not properly matched to the wheel's rim. Serious injury or damage can also occur if wheel rim and tire bead are not properly lubricated prior to installation or maximum tire pressure is exceeded when seating the tire bead on the rim.
- Never drive on tires that have less than 2/32nds of an inch of tread remaining; replace tires as soon as the tread reaches the tread wear indicators molded into the tread grooves of the tire which reveal when the tread depth remaining is 2/32nds of an inch.
- Proper tire inflation is essential. Under-inflation produces flexing
 of sidewalls and builds up heat to the point that premature tire failure
 may occur. Over-inflation can cause the tire to be more susceptible
 to impact damage, but do not reduce pressure when tires are hot.
- Check air pressure at least monthly when tires are "cold" a "cold" tire is one that has been stationary typically for a minimum of 2 hours or driven less than 2 miles. Use an accurate tire air pressure gauge.
- Never overload the tires. The maximum load capacity and maximum inflation pressure are molded into the sidewall of your tire. Overloading a tire will result in the build up of excessive heat, which can lead to early tire failure. Overloading a tire will render a tire ineligible for warranty.
- Avoid damaging objects (potholes, glass, rocks, curbs, etc.), which may cause internal tire damage. Continued use of a tire that has suffered internal damage (which may not be visible externally) can lead to serious/dangerous tire failure.
- Inspection and the determination of the internal damage to a tire requires dismounting of the tire from the wheel and examination – all of which should be done only by a tire professional.
- Excessive speeds create heat buildup in a tire, leading to possible tire failure. "Excessive speed" is a speed that does not take into consideration the weight of the load/and or the condition of the road you are traveling on. Never travel above the legal posted limit and slow down to a proper speed accordingly.
- Properly load and distribute the weight of the load in your vehicle. Improper weight distribution can have adverse affects on the safety of the vehicle and the performance of the tires.

	kPA		450		480	520	550	1/	590		620		4
TIRE SIZE	psi		65		70	75	80		85		90		
215/75R17.5	DUAL	lbs.	Τ <u></u> '		3305	3415	3525(E)	124	3640	'	3750		
.10/70h17.5	SINGLE	lbs.	Γ		3525	3640	3750(E)	126	3860	'	3970		
235/75R17.5	DUAL	lbs.			4190	4300	4410(E)	132	4510		4675		
.35/75h17.5	SINGLE	lbs.			4410	4510	4675(E)	134	4805		4940		
	DUAL	lbs.			4190	4300	4410(E)	132	4510	I'	4675		
245/70R17.5	SINGLE	lbs.	<u>ا</u> ا		4410	4510	4675(E)	134	4805	I '	4940		
	DUAL	lbs.	2600(D)	114	2720	2860	3000(E)	119	3115		3245		
225/70R19.5	SINGLE	lbs.	2755(D)	116	2895	3040	3195(E)	121	3315		3450		
	DUAL	lbs.	2910		3070	3220	3415		3515	,	3655		
245/70R19.5	SINGLE	lbs.	3085		3265	3425	3640		3740		3890		1
	DUAL	lbs.	3195		3430	3600	3750		3930		4095		
265/70R19.5	SINGLE	lbs.	3415		3650	3830	3970		4180		4355		
	DUAL	lbs.	,		3860	4045	4230		4410(E)	132	4585		
10R22.5	SINGLE	lbs.	+		4080	4280	4480		4675(E)	134	4850	1	\uparrow
	DUAL	lbs.			4380	4580	4760		4950		5205(F)	138	
11R22.5	SINGLE	lbs.			4530	4770	4990		5220		5510(F)	140	
	DUAL	lbs.			4780	4990	5190		5390		5675(F)	141	
12R22.5	SINGLE	lbs.	+	<u> </u>	4940	5200	5450		5690	′	6005(F)	143	\vdash
	DUAL	lbs.				5345	5675		5840		6070		
315/80R22.5	SINGLE	lbs.				5875	6175		6415		6670		
	DUAL	lbs.	+			4860	5070		5305		5525		
295/80R22.5	SINGLE	lbs.	+	<u> </u>	+	5340	5510	<u> </u>	5830	′	6070	<u> </u>	\vdash
	DUAL	lbs.			4095	4300	4540		4690		4885		
295/75R22.5	SINGLE	lbs.			4500	4300	4940		5155		5370		
	DUAL	lbs.					4940		4940		5070		
275/70R22.5	SINGLE	lbs.	+	+	+		5205	<u> </u>	5355	[]	5510	 	\vdash
	DUAL	lbs.	3415		3585	3765	3970		4110		4275		
255/70R22.5	SINGLE	lbs.	3640		33815	4005	4190		4110		4275		
	DUAL	lbs.	0010		3013	1000	4100		4010		4000		-
385/65R22.5	SINGLE	lbs.	6060		6380	6720	6940	<u> </u>	7350	·'	7650		\vdash
	DUAL	lbs.	0000		0300	0120	0540		1000		1000		
425/65R22.5	SINGLE	lbs.	7210		7590	7990	8270		8740		9100		
			7210		/590	1990	0210		0740		9100		
445/65R22.5	DUAL SINGLE	lbs.	7900		0000	0880		 		<u>├───</u> ′		 	\vdash
	SINGLE	lbs.	7800	-	8230	8660	9090	<u> </u>	9480		9870	<u> </u>	\vdash
445/50R22.5		lbs.	0175		0570	C040	7010		7000		2000		
	SINGLE	lbs.	6175		6570	6940	7310		7680		8030		
12.00R24		lbs.	<u> </u> '	 	6120	6390	6650	 	6910	·'	7160	 	+
	SINGLE	lbs.	<u> </u>		6330	6660	6980		7280	L	7580	<u> </u>	\vdash
11R24.5	DUAL	lbs.			4660	4870	5070		5260		5510(F)	140	
	SINGLE	lbs.			4820	5070	5310		5550		5840(F)	142	
	DUAL	lbs.		1	1	4340	4540	1	4740	1	4930	1	1

* Every effort has been made to verify the accuracy of the listed specifications. TBC Corporation and TBC Brands cannot be held responsible for any discrepancies, and as such, the information should be considered as approximate.

										<u> </u>				UN	
655		690		720		760		790		825		860		900	
95		100		105		110		115		120		125		130	
3860(F)	127	3970		4080		4190(G)	130	4300		4410		4540(H)	133		
4080(F)	129	4190		4300		4410(G)	132	4540		4675		4805(H)	135		
4805(F)	135	4940		5070		5205(G)	138	5355		5510		5675(H)	141		
5070(F)	137	5205		5355		5510(G)	140	5675		5840		6005(H)	143		
4805(F)	135	4940		5070		5205(G)	138	5355		5510		5675(H)	141		
5070(F)	137	5205		5355		5510(G)	140	5675		5840		6005(H)	143		
3415(F)	123	3490		3615		3750(G)	126	3855		3970(H)	128				
3640(F)	125	3715		3845		3970(G)	128	4100		4190(H)	130				
3860(F)	127	3940		4075		4300(G)	131	4345		4540(H)	133				
4080(F)	129	4190		4335		4540(G)	133	4620		4805(H)	135				
4300		4405		4415		4675(G)	134								
4540		4685		4850		5070(G)	137								
4760		4940(F)	136	5075		5210		5355(G)	139						
5025		5205(F)	138	5360		5515		5675(G)	141						
5415		5625		5840(G)	142	5895		5950		6005(H)	143				
 5730		5950		6175(G)	144	6320		6465		6610(H)	146				
5785		5895		6005(G)	143	6265		6525		6780(H)	147				
6205		6405		6610(G)	146	6870		7130		7390(H)	150				
6395(G)	145	6545		6770	140	6940(H)	148	7210		7610(J)	151	7910		8270(L)	15
 6940(G)	143	7190		7440		7610(H)	151	7920		8270(J)	154	8690		9090(L)	15
5840	140	5945		6150		6395	131	6550		6780(H)	147	6950		7160(J)	14
 6395		6535		6760		6940		7200		7390(H)	150	7640		7830(J)	15
	137	5260		5440			141	5795				7040		7030(3)	15
 5070(F)						5675(G)				6005(H)	143				
5510(F)	140	5780		5980		6175(G)	144	6370		6610(H)	146	0175		C205(11)	
5205		5355		5510		5675		5840		6005		6175		6395(H)	14
5675		5840		6005		6175		6395		6610		6780		6940(H)	14
 4410		4455		4610		4675(G)	134	4915		5070(H)	137				
4675		4895		5065		5205(G)	138	5400		5510(H)	140				
 8050		8230		8510		8820		9050		9370(J)	158			9920(L)	16
9370		9790		10100		10500(J)	162	10700		11400(L)	165				
 10200(H)	161	10600		11000		11400		11700		12300(L)	168			12800(M)	16
8390		8740		9090		9370(J)	158	9780		10200(L)	161				
7390(G)	150	7610		7830		8050(H)	153	8300		8540(J)	155				
8050(G)	153	8310		8570		8820(H)	156	9100		9370(J)	158				
5675		5840		6005(G)	143	6205		6405		6610(H)	146				
6095		6350		6610(G)	146	6790		6970		7160(H)	149				
5205(F)	138	5310		5495		5675(G)	141	5860		6175(H)	144				
 5675(F)	141	5835		6040		6175(G)	144	6440		6780(H)	147				



gosailun.com • tbcbrands.com • treadxpress.com • 1-866-822-4968

