



The Terramax A/T 4s is one of the first tires in the value tier to be approved for severe snow conditions and designated with the 3PMS Mountain/Snowflake symbol. Designed to deliver superior traction for SUVs, pickups and vans both on and off the road. The Terramax A/T 4s provides exceptional handling and on- and off-road stability, while maintaining a comfortable ride.



3 Peak Mountain Snowflake Certified
(3PMS) for severe snow performance.

Jagged edge tread blocks improve grip on ice and in the mud, providing superior traction. Zig zag grooves and continuous center block provide outstanding grip and superior handling.




Aggressive, open shoulder design increases stability and traction in all weather conditions. Trapezoidal claw design on the shoulder edge increases traction in snow and mud, dissipates heat and enhances durability.



Stone ejectors withstand harsh road conditions.



P-METRIC = 500 A B

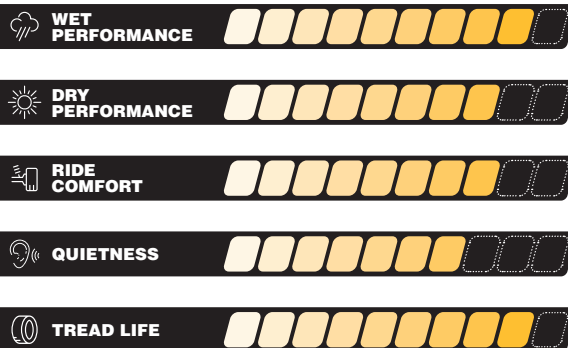

ARTICLE NO.	TIRE SIZE	SERVICE DESC.	LOAD RANGE	UTQG	TREAD DEPTH (32ND)	SIDE WALL	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	SINGLE MAX LOAD (LBS @ PSI)	DUAL MAX LOAD (LBS @ PSI)	SHIP WEIGHT (LBS)
5549252	235/75R15	109S	XL	500 A B	13	OWL	6.5	9.25	28.86	2271@50	-	31
5549254	245/75R16	111S	SL	500 A B	13	OWL	7.0	9.77	30.48	2403@44	-	34
5549258	265/75R16	116S	SL	500 A B	13	OWL	7.5	10.51	31.66	2756@44	-	38
5549251	235/70R16	106S	SL	500 A B	13	OWL	7.0	9.45	28.98	2094@44	-	31
5549256	265/70R16	112T	SL	500 A B	13	OWL	8.0	10.71	30.64	2469@44	-	36
5549257	265/70R17	115S	SL	500 A B	13	OWL	8.0	10.71	31.66	2679@44	-	38
5549253	245/65R17	107S	SL	500 A B	13	OWL	7.0	9.77	29.53	2149@44	-	33
5549255	265/65R17	112S	SL	500 A B	13	OWL	8.0	10.71	30.56	2469@44	-	37
5549261	275/65R18	116T	SL	500 A B	13	OWL	8.0	10.99	32.09	2750@44	-	40
5549260	275/60R20	115T	SL	500 A B	13	BSW	8.0	10.99	33.00	2679@44	-	42
5549259	275/55R20	117T	XL	500 A B	13	BSW	8.5	11.18	31.90	2833@50	-	40
5549265	LT235/85R16	120/116S	E	-	16	BSW	6.5	9.25	31.74	3042@80	2778@80	42
5549263	LT225/75R16	115/112S	E	-	16	BSW	6.0	8.78	29.30	2680@80	2470@80	37
5549267	LT245/75R16	120/116S	E	-	16	BSW	7.0	9.77	30.48	3042@80	2778@80	42
5549271	LT265/75R16	123/120S	E	-	16	OWL	7.5	10.51	31.66	3415@80	3085@80	46
5549278	LT285/75R16	126/123S	E	-	16	OWL	8.0	11.26	32.84	3750@80	3415@80	51
5549264	LT235/80R17	120/117R	E	-	16	OWL	6.5	9.25	31.82	3085@80	2835@80	43
5549268	LT245/75R17	121/118S	E	-	16	OWL	7.0	9.77	31.50	3195@80	2910@80	44
5549266	LT245/70R17	119/116S	E	-	16	OWL	7.0	9.77	30.56	3000@80	2755@80	42
5549269	LT265/70R17	121/118S	E	-	16	OWL	8.0	10.71	31.66	3195@80	2910@80	46
5549276	LT285/70R17	121/118S	E	-	16	OWL	8.5	11.50	32.76	3195@80	2910@80	51
5549270	LT265/70R18	124/121R	E	-	16	BSW	8.0	10.71	32.64	3525@80	3195@80	49
5549274	LT275/70R18	125/122R	E	-	16	OWL	8.0	10.99	33.19	3640@80	3305@80	52
5549272	LT275/65R18	123/120S	E	-	16	OWL	8.0	10.99	32.09	3415@80	3085@80	49
5549273	LT275/65R20	126/123S	E	-	16	BSW	8.0	10.99	34.10	3750@80	3415@80	52
5549262	31×10.50R15LT	109S	C	-	16	OWL	8.5	10.55	30.52	2270@50	-	41