



TERRAMAX AT2



ON/OFF ROAD LIGHT TRUCK & SUV TIRE

Terramax AT2 elevates your driving experience with superior traction on/off-road. Built with purpose for SUVs, pickup trucks, and vans. Aggressive open shoulder tread design, that is 3PMS certified expels water, snow, slush, mud for optimum traction. Center rib ensures superior ride stability and control. Deep tread sipes create additional tread surface and increase traction. Ensure your peace of mind with industry-leading warranty. Experience exceptional handling, stability, and a quiet ride with the Terramax AT2.



YEAR-ROUND ASSURANCE


3 Peak Mountain Snowflake Certified (3PMS) guarantees premium top-tier performance in severe snow conditions.

ENHANCED CONTROL

The center rib ensures ride control and a stable drive.

DURABILITY

Protective sidewall biters provide extra traction and help prolong the tire's lifespan.

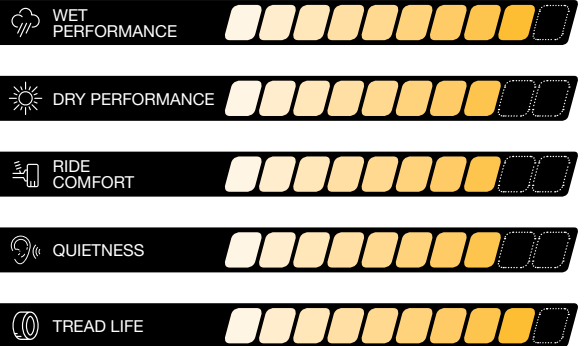

ARTICLE NO.	TIRE SIZE	SERVICE DESC.	LOAD RANGE	UTQG	TREAD DEPTH (32ND)	SIDE WALL	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	SINGLE MAX LOAD (LBS @ PSI)	DUAL MAX LOAD (LBS @ PSI)	SHIP WEIGHT (LBS)
1600612K	235/75R15	109S	XL	620 A B	13	BSW	6.5	9.3	29	2271@50		34
1600614K	265/70R16	112T		620 A B	13	BSW	8.0	10.7	31	2469@44		41
1600615K	235/70R16	106S		620 A B	13	BSW	7.0	9.4	29	2094@44		35
1600622K	265/75R16	116S		620 A B	13	BSW	7.5	10.5	32	2756@44		42
1600630K	245/75R16	111S		620 A B	13	BSW	7.0	9.8	31	2403@44		38
1600613K	265/70R17	115S		620 A B	13	BSW	8.0	10.7	32	2679@44		43
1600621K	235/65R17	104S		620 A B	13	BSW	7.0	9.4	30	1984@44		35
1600623K	255/65R17	110T		620 A B	13	BSW	7.5	10.2	31	2337@44		39
1600627K	265/65R17	112S		620 A B	13	BSW	8.0	10.7	31	2469@44		40
1600629K	245/65R17	107S		620 A B	13	BSW	7.0	9.8	30	2149@44		38
1600631K	245/70R17	110T		620 A B	13	BSW	7.0	9.8	31	2337@44		39
1600637K	275/65R18	116T		620 A B	13	BSW	8.0	11.0	33	2756@44		47
1600645K	265/65R18	114T		620 A B	13	BSW	8.0	10.7	32	2601@44		44
1600646K	265/70R18	116T		620 A B	13	BSW	8.0	10.7	33	2756@44		45
1600654K	265/60R18	114T	XL	620 A B	13	BSW	8.0	10.7	31	2601@50		41
1600611K	275/55R20	117T	XL	620 A B	13	BSW	8.5	11.2	32	2833@50		45
1600634K	265/50R20	111T	XL	620 A B	13	BSW	8.5	10.9	31	2403@50		42
1600638K	275/60R20	115T		620 A B	13	BSW	8.0	11.0	33	2679@44		50
1600635K	285/45R22	114H	XL	620 A B	13	BSW	9.5	11.2	33	2601@50		46
1600617K	LT225/75R16	115/112S	10PR		16	BSW	6.0	8.8	30	2680@80	2470@80	41
1600618K	LT235/85R16	120/116S	10PR		16	BSW	6.5	9.3	32	3042@80	2778@80	46
1600619K	LT265/75R16	123/120S	10PR		16	BSW	7.5	10.5	32	3415@80	3085@80	49
1600620K	LT245/75R16	120/116S	10PR		16	BSW	7.0	9.8	31	3042@80	2778@80	46
1600624K	LT265/70R17	123/120S	10PR		16	BSW	8.0	10.7	32	3415@80	3085@80	51
1600625K	LT245/70R17	119/116S	10PR		16	BSW	7.0	9.8	31	3000@80	2755@80	45
1600626K	LT235/80R17	120/117R	10PR		16	BSW	6.5	9.3	32	3085@80	2835@80	47
1600628K	LT245/75R17	121/118S	10PR		16	BSW	7.0	9.8	32	3195@80	2910@80	47
1600632K	LT285/70R17	126/123S	10PR		16	BSW	8.5	11.5	33	3750@80	3415@80	55
1600633K	LT315/70R17	126/123S	10PR		16	BSW	9.5	12.7	35	3750@65	3415@65	63
1600644K	LT275/65R18	123/120R	10PR		16	BSW	8.0	11.0	33	3415@80	3085@80	54
1600647K	LT275/70R18	125/122R	10PR		16	BSW	8.0	11.0	34	3640@80	3305@80	55
1600648K	LT265/70R18	124/121S	10PR		16	BSW	8.0	10.7	33	3525@80	3195@80	53
1600636K	LT275/65R20	126/123R	10PR		16	BSW	8.0	11.0	35	3750@80	3415@80	56
1600649K	LT275/60R20	123/120R	10PR		16	BSW	8.0	11.0	33	3415@80	3085@80	56
1600650K	LT265/60R20	121/118R	10PR		16	BSW	8.0	10.7	33	3195@80	2910@80	53
1600651K	LT305/55R20	121/118R	10PR		16	BSW	9.5	12.4	34	3195@65	2910@65	61
1600652K	LT275/55R20	120/117R	10PR		16	BSW	8.5	11.2	32	3085@80	2835@80	54
1600653K	LT285/60R20	125/122R	10PR		16	BSW	8.5	11.5	34	3640@80	3305@80	58
1600616K	31X10.50R15LT	109S	6PR		16	BSW	8.5	10.6	31	2270@50		44
1600642K	35X12.50R17LT	125R	10PR		16	BSW	10.0	12.5	35	3640@65		63
1600639K	33X12.50R18LT	118S	10PR		16	BSW	10.0	12.5	33	2910@65		60
1600640K	35X12.50R18LT	123R	10PR		16	BSW	10.0	12.5	35	3415@65		64
1600641K	33X12.50R20LT	114S	10PR		16	BSW	10.0	12.5	33	2600@65		62
1600643K	35X12.50R20LT	121R	10PR		16	BSW	10.0	12.5	35	3195@65		64