

ALL-WEATHER TIRE




Suitable for diverse climates and weather conditions, eliminating the need for seasonal tire changes, and extra storage space.



Specifically engineered to optimize handling, stability, and traction, providing confident performance on both dry and wet roads.



3PMSE certified tire features four circumferential grooves and multi-siped tread blocks that provide reliable traction, efficiently expelling water and slush while delivering extra bite in winter conditions.

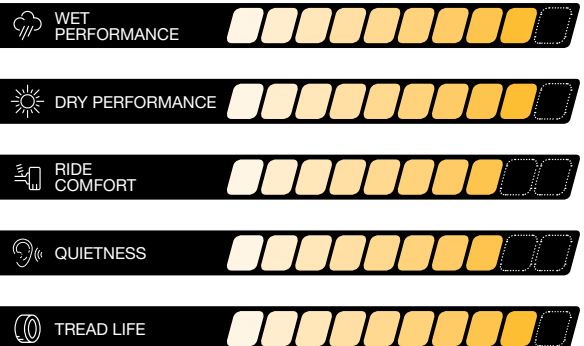

ARTICLE NO.	TIRE SIZE	SERVICE DESC.	LOAD RANGE	UTQG	TREAD DEPTH (32ND)	SIDE WALL	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	SINGLE MAX LOAD (LBS @ PSI)	SHIP WEIGHT (LBS)
1603468	185/65R15	88H		500 A A	11	BSW	5.5	7.4	24.4	1235@44	33
1603469	195/65R15	91H		500 A A	11	BSW	6.0	7.9	25.0	1356@44	33
1603470	205/55R16	91V		500 A A	11	BSW	6.5	8.4	24.9	1356@44	35
1603471	205/60R16	96V	XL	500 A A	11	BSW	6.0	8.2	25.7	1565@50	35
1603472	205/65R16	95H		500 A A	11	BSW	6.0	8.2	26.5	1521@44	35
1603473	215/55R16	93V		500 A A	11	BSW	7.0	8.9	25.3	1433@44	35
1603474	215/60R16	99H	XL	500 A A	11	BSW	6.5	8.7	26.1	1709@50	35
1603475	215/65R16	102H	XL	500 A A	11	BSW	6.5	8.7	27.0	1874@50	35
1603476	235/70R16	106H		500 A A	11	BSW	7.0	9.4	29.0	2094@44	35
1603477	205/50R17	93V	XL	500 A A	11	BSW	6.5	8.4	25.1	1433@50	37
1603478	215/45R17	91W	XL	500 A A	11	BSW	7.0	8.4	24.6	1356@50	37
1603479	215/50R17	95W	XL	500 A A	11	BSW	7.0	8.9	25.5	1521@50	37
1603480	215/55R17	98V	XL	500 A A	11	BSW	7.0	8.9	26.3	1653@50	37
1603481	215/60R17	100H	XL	500 A A	11	BSW	6.5	8.7	27.2	1764@50	37
1603482	215/65R17	103H	XL	500 A A	11	BSW	6.5	8.7	28.0	1929@50	37
1603483	225/45R17	94V	XL	500 A A	11	BSW	7.5	8.9	25.0	1477@50	37
1603484	225/50R17	98V	XL	500 A A	11	BSW	7.0	9.2	25.9	1653@50	37
1603485	225/55R17	101V	XL	500 A A	11	BSW	7.0	9.2	26.8	1819@50	37
1603486	225/60R17	103H	XL	500 A A	11	BSW	6.5	9.0	27.6	1929@50	37
1603487	225/65R17	102H		500 A A	11	BSW	6.5	9.0	28.5	1874@44	37
1603488	235/55R17	103V	XL	500 A A	11	BSW	7.5	9.6	27.2	1929@50	37
1603489	235/65R17	108H	XL	500 A A	11	BSW	7.0	9.4	29.1	2205@50	37
1603490	225/40R18	92V	XL	500 A A	11	BSW	8.0	9.1	25.1	1389@50	40
1603491	225/45R18	95V	XL	500 A A	11	BSW	7.5	8.9	25.9	1521@50	40
1603492	225/50R18	99V	XL	500 A A	11	BSW	7.0	9.2	26.9	1709@50	40
1603493	225/55R18	102V	XL	500 A A	11	BSW	7.0	9.2	27.8	1874@50	40
1603494	225/60R18	104H	XL	500 A A	11	BSW	6.5	9.0	28.6	1984@50	40
1603495	235/40R18	95V	XL	500 A A	11	BSW	8.5	9.5	25.4	1521@50	40
1603496	235/45R18	98W	XL	500 A A	11	BSW	8.0	9.3	26.3	1653@50	40
1603497	235/50R18	101V	XL	500 A A	11	BSW	7.5	9.6	27.3	1819@50	40
1603498	235/55R18	104V	XL	500 A A	11	BSW	7.5	9.6	28.1	1984@50	40
1603499	235/60R18	107H	XL	500 A A	11	BSW	7.0	9.4	29.1	2149@50	40
1603500	235/65R18	110H	XL	500 A A	11	BSW	7.0	9.4	30.0	2337@50	40
1603501	245/40R18	97W	XL	500 A A	11	BSW	8.5	9.8	25.7	1609@50	40
1603502	245/60R18	109H	XL	500 A A	11	BSW	7.0	9.8	29.6	2271@50	40
1603503	225/55R19	103V	XL	500 A A	11	BSW	7.0	9.2	28.8	1929@50	42
1603504	235/40R19	96V	XL	500 A A	11	BSW	8.5	9.5	26.4	1565@50	42
1603505	235/50R19	103W	XL	500 A A	11	BSW	7.5	9.6	28.3	1929@50	42
1603506	235/55R19	105V	XL	500 A A	11	BSW	7.5	9.6	29.2	2039@50	42
1603514	245/45R19	102V	XL	500 A A	11	BSW	8.0	9.6	27.7	1874@50	42
1603507	255/35R19	96V	XL	500 A A	11	BSW	9.0	10.2	26.0	1565@50	42
1603508	255/40R19	100V	XL	500 A A	11	BSW	9.0	10.2	27.0	1764@50	42
1603509	235/55R20	105V	XL	500 A A	11	BSW	7.5	9.6	30.2	2039@50	44
1603510	245/45R20	103V	XL	500 A A	11	BSW	8.0	9.6	28.7	1929@50	44
1603511	245/50R20	105V	XL	500 A A	11	BSW	7.5	10.0	29.7	2039@50	44
1603512	255/45R20	105V	XL	500 A A	11	BSW	8.5	10.0	29.1	2039@50	44
1603513	265/50R20	111V	XL	500 A A	11	BSW	8.5	10.9	30.5	2403@50	44
1603515	235/65R16C	121/119R	LR E		13	BSW	7.0	9.4	28.0	3197@83	36